


SMARTUV Innovation... Two Decades of providing Reliable UV Treatment.

Competing UV Manufacturers and their dealers cannot justify their flow rates. Why? Because they grossly overrate their UV equipment! Overrated UVs will not deliver the required UV dose and will result in a disappointed customer.

The Emperor Aquatics, Inc. SMART UV difference is INTEGRITY. Compare our lower SMART UV flow rates to any competitor's flow rates. Call them, question their numbers and request a copy of the calculations that support their claims. You'll most likely find that they offer little technical assistance.

Below, see how our competitors' **Small UVs and Exaggerated Flow Rates** will always leave you **Short**.

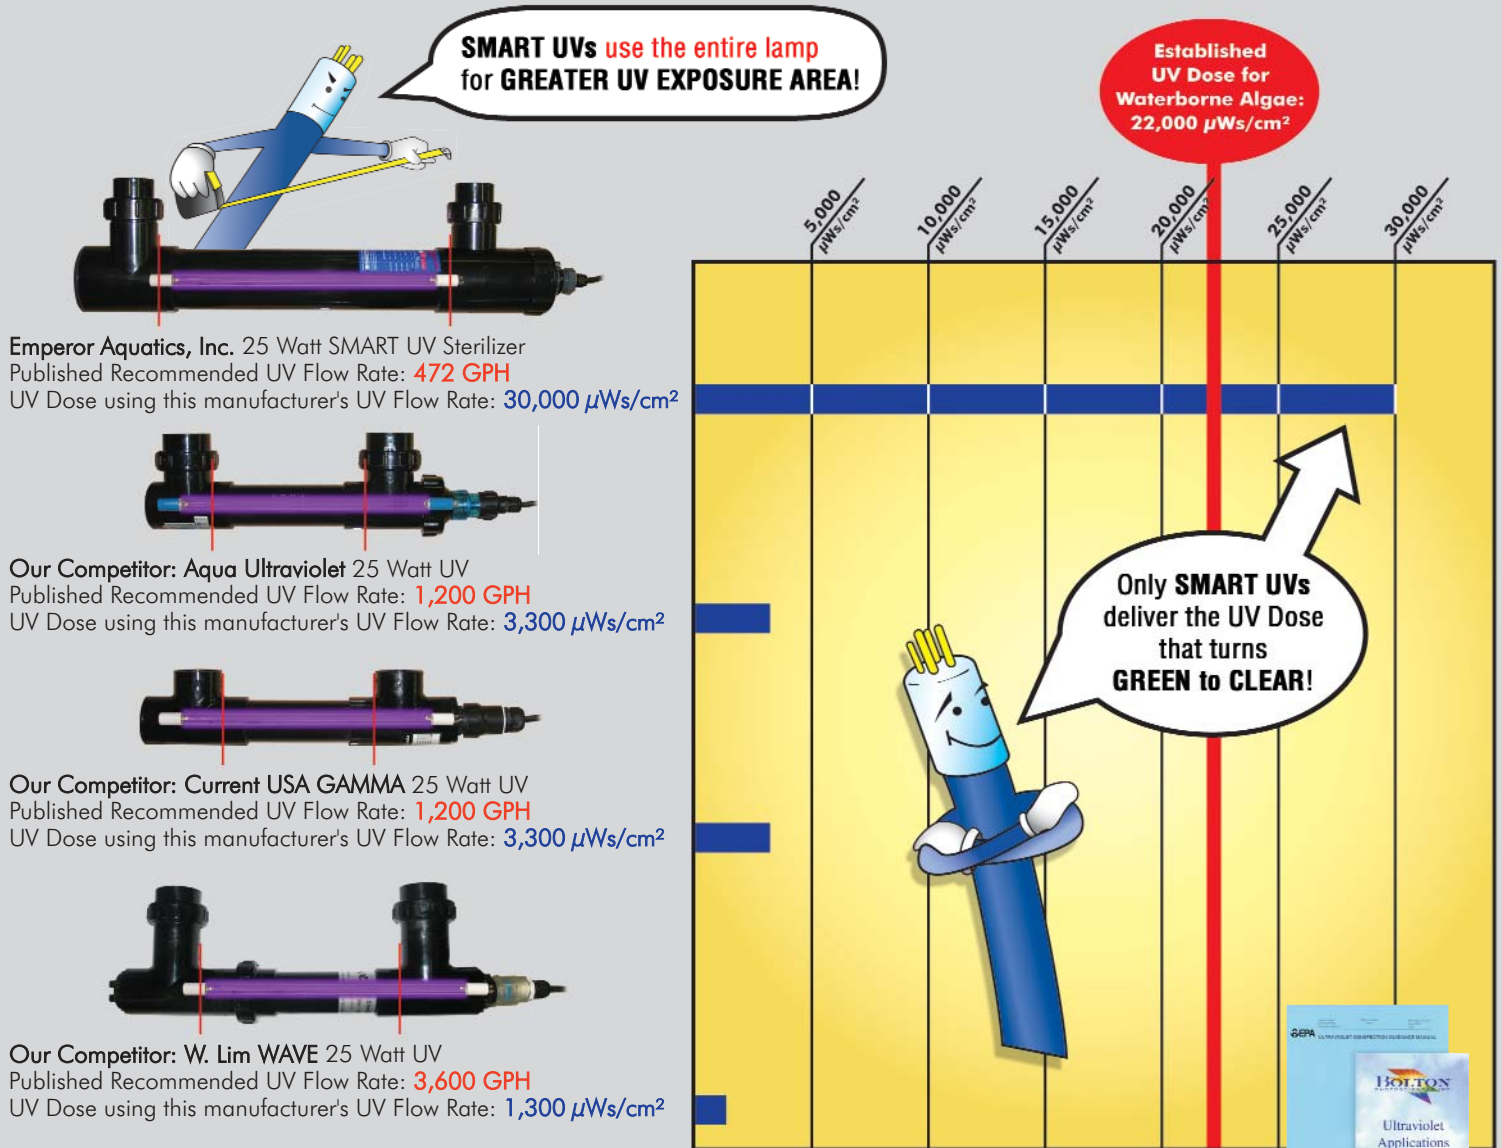

RED = Manufacturer's Published UV Flow Rate
BLUE = Actual UV Dose Received using the Manufacturer's Published UV Flow Rate

Note: The UV Flow Rate establishes the achieved UV Dose. For Successful UV Treatment of Waterborne Algae, the required UV dose is 22,000 μWs/cm².
Note: All calculations are based upon actual equipment specifications using the *Bolton Photosciences, Inc. "UV CALC" program*, which is recognized by the EPA (United States Environmental Protection Agency).

When their answers don't make sense remember Emperor Aquatics, Inc.!



For more information visit: www.smartuv1000dollarchallenge.com and www.uvcomparison.com